

**MVT 665 T/675 T**  
**MHT 7140 T**  
**MHT 10120 LT**  
**MHT 10160 LT**

**6,00 m/9,70 m**  
**6500 kg/16000 kg**

- Moteur : 106 cv Turbo (MVT)  
Turbo 170 cv (MHT)
- Transmission hydrostatique



**MT 732**  
**MT 932**

**6,90 m/9,00 m**  
**3200 kg**

- Moteur : 84 cv



**MT 1033 HLT**  
**MT 1030 S\***

**9,60 m/9,98 m\***  
**3300 kg/3000 kg\***





- Moteur : 84\*/100 cv
- Correcteur de dévers : 10°/10°
- Transmission hydrostatique
- \* Stabilisateurs
- \* Convertisseur de couple



**MT 1235 S/ST**  
**MT 1240 LT\***

**12,00 m/11,64 m\***  
**3500 kg/4000 kg\***

- \* Correcteur de dévers : 10°/10°

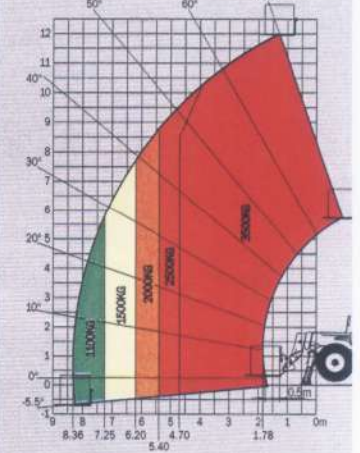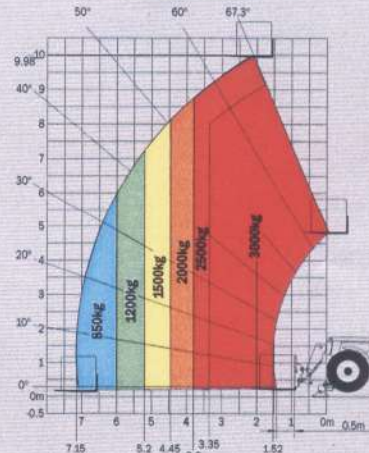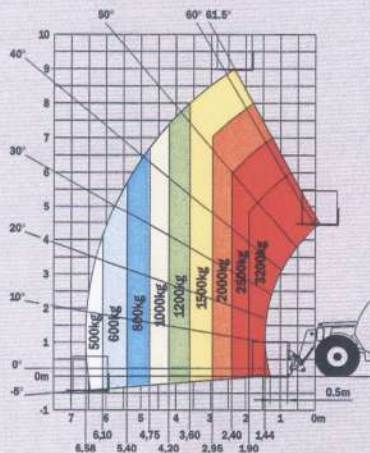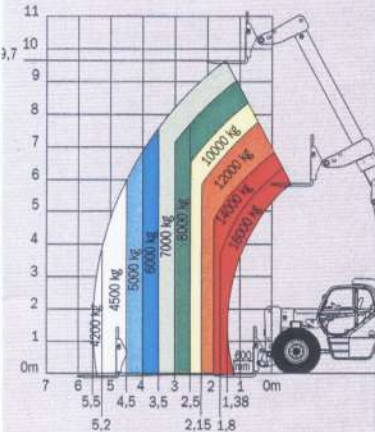

**MHT 10160 LT**

**MT 932**

**MT 1030 S**

**MT 1235 S/ST**

16000 kg

3200 kg

3000 kg

3500 kg

9,70 m

9,00 m

9,98 m

12 m

5,50 m

6,58 m

7,15 m

8,36 m

5,50 m

4,75 m

6,00 m

8,36 m

5,50 m

3,60 m

5,20 m

7,25 m

5580 kg

673 kg

1160 kg

1465 kg

15500 daN

8400 daN

8200 daN

8600 daN

170/125

84/61.5

84/61,5

84/61,5 - 100/74,5

5,44 m

3,67 m

3,75 m

4,15 m

6,81 m

4,77 m

4,95 m

5,39 m

2,93 m/2,50 m

2,30 m/2,26 m

2,30 m x 2,26 m

2,57 m/ 2,32 m

6,60 m

4,71 m

4,99 m

5,60 m

16,00 R25 XRB

400/80 - 24 TL 156 B

400/80 - 24 TL 156 B

400/80 - 24 TL 156 B

16,00 R25 XRB

400/80 - 24 TL 156 B

400/80 - 24 TL 156 B

400/80 - 24 TL 156 B

23615 kg

7640 kg

7470kg

8960 kg